


Alloy Chain Slings

Quadruple Type: Q

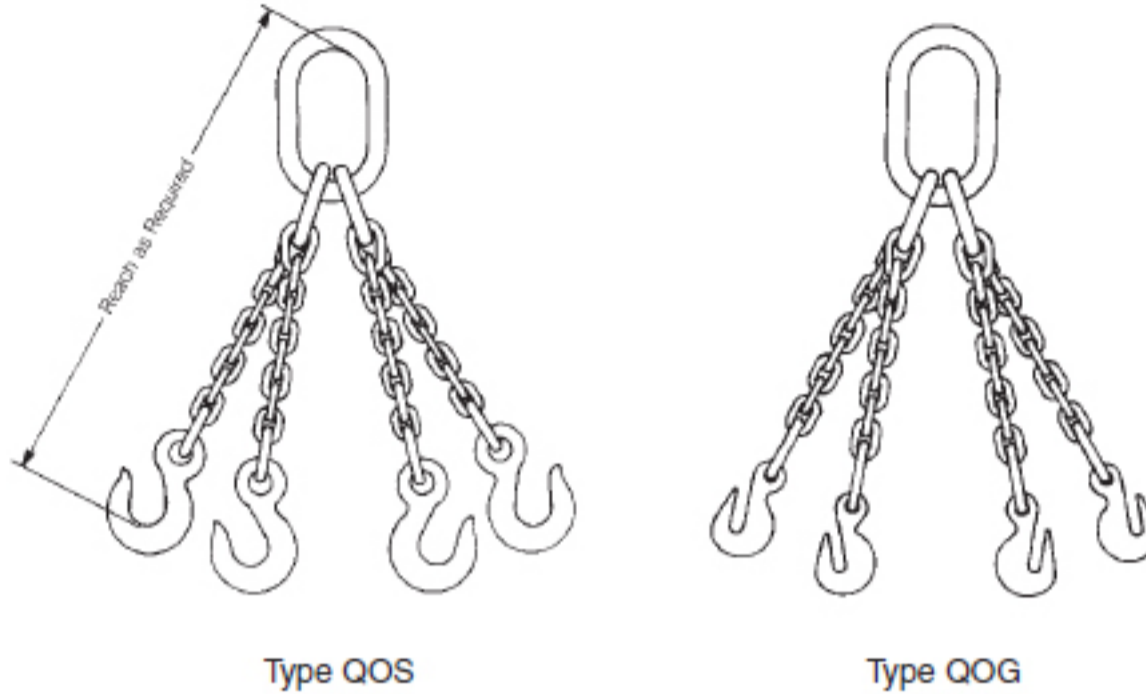

Type QOS

Type QOG

| Quadruple Type: Q | | | | | | | | | | | | | | | | | | | | | |
|-------------------|----|--------|----------------------|-----|-------------------|-----|--------|-----|----------------------|----|-------------------|-----|-------|-----|--------------------|-------|-------------|-------|-------------|-------|----|
| Chain Size | | System | Oblong Master Link | | | | | | Master Coupling Link | | | | | | Working Load Limit | | | | | | |
| | | | Normal Size Material | | Inside Dimensions | | | | Normal Size Material | | Inside Dimensions | | | | Quad at 60° | | Quad at 45° | | Quad at 30° | | |
| | | | In. | mm | in. | mm. | Width | | Length | | in. | mm | Width | | Length | | lb | kg | lb | kg | lb |
| | | | | in. | mm. | in. | mm. | in. | mm. | | | in. | mm | in. | mm | | | | | | |
| 9/32 | 7 | 10 | 13/16 | 21 | 3 | 76 | 6 | 152 | 17/32 | 13 | 1 1/2 | 38 | 2 5/8 | 67 | 11200 | 5100 | 9100 | 4100 | 6450 | 2900 | |
| 3/8 | 10 | 10 | 1 1/8 | 29 | 4 | 102 | 8 | 203 | 25/32 | 20 | 1 5/8 | 41 | 2 7/8 | 73 | 22800 | 10300 | 18600 | 8400 | 13200 | 6000 | |
| 1/2 | 13 | 10 | 1 1/4 | 32 | 4 | 102 | 8 | 203 | 1 | 25 | 3 | 76 | 5 | 127 | 39000 | 17700 | 31800 | 14400 | 22500 | 10200 | |
| 5/8 | 16 | 10 | 1 5/8 | 41 | 5 1/4 | 133 | 10 1/2 | 267 | 1 1/4 | 32 | 4 | 102 | 6 | 152 | 58700 | 26600 | 47900 | 21700 | 33900 | 15400 | |
| 3/4 | 20 | 10 | 1 7/8 | 48 | 6 | 152 | 12 | 305 | 1 1/2 | 38 | 4 | 102 | 6 | 152 | 91700 | 41600 | 74900 | 34000 | 53000 | 24000 | |
| 7/8 | 22 | 10 | 2 1/4 | 57 | 8 | 203 | 16 | 406 | 1 3/4 | 44 | 4 | 102 | 6 | 152 | 110900 | 50250 | 90600 | 41050 | 64000 | 29050 | |
| 1 | 26 | 8 | 2 1/4 | 57 | 8 | 203 | 16 | 406 | 1 7/8 | 48 | 5 | 127 | 7 | 178 | 123900 | 56900 | 101200 | 46500 | 71500 | 32800 | |
| 1 1/4 | 32 | 8 | 2 3/4 | 70 | 9 | 229 | 16 | 406 | 2 1/8 | 54 | 6 | 152 | 9 | 229 | 187800 | 85200 | 153400 | 69600 | 108400 | 49200 | |

Dimensions are approximate.

Quadruple chain slings are available in other combinations.

Note: In practice hooks on "Q" slings are in the plane opposite that shown.

+See Oblong Master Link Sub-Assembly for complete dimensions.

These items are made to order.

⚠ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

⚠ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** if the chain or components are visibly distorted or worn.